


Geophones Specifications

HIGH-SENSITIVITY GEOPHONES SENSORS

SG-5

Natural Frequency ($\pm 7.5\%$)	5 Hz
Coil Resistance ($\pm 5\%$)	1850 Ω
Pk-Pk Coil Travel	3 mm
Harmonic Distortion ⁽¹⁾	$\leq 0.1\%$
Sensitivity ($\pm 5\%$)	80 V/m/s
Open Circuit Damping ($\pm 7.5\%$)	0.6
Moving Mass	22.7 g
Spurious Frequency	≥ 150 Hz
AC Impedance	5082 Ω (12 Hz)
Diameter	32 mm
Length	43 mm
Weight	170 g
Operating Temperature	-40 ° to 80 °C


Parameters are specified at 22 °C - 0 to 10 degree tilt

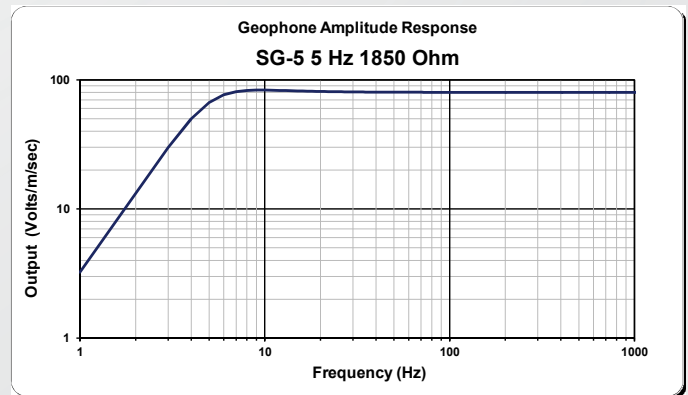

SG-10HS

Natural Frequency ($\pm 3.5\%$)	10 Hz
Coil Resistance ($\pm 3.5\%$)	1800 Ω
Pk-Pk Coil Travel	2.6 mm
Harmonic Distortion ⁽¹⁾	$\leq 0.1\%$
Sensitivity ($\pm 3.5\%$)	85.8 V/m/s
Open Circuit Damping ($\pm 3.5\%$)	0.56
Moving Mass	19.5 g
Spurious Frequency	≥ 250 Hz
AC Impedance	6875 Ω (12 Hz)
Diameter	32 mm
Height	43 mm
Weight	170 g
Working Temperature	-40° to 80 °C
Storage Temperature	-40° to 80 °C

Parameters are specified at 22 °C - 0 to 15 degree tilt

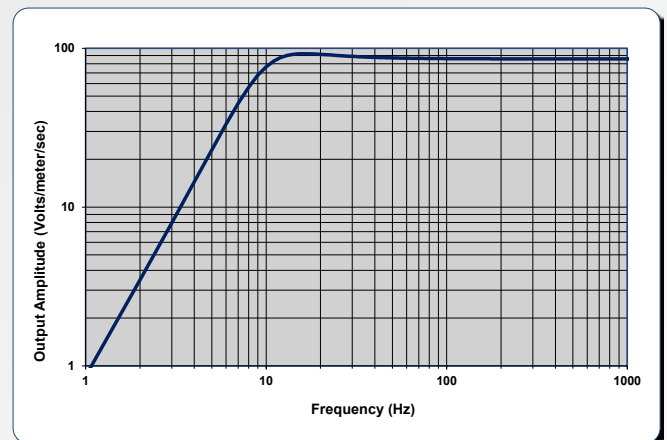


HIGH-PERFORMANCE GEOPHONES SENSORS

SG-10

Operating Position	Vertical
Natural Frequency ($\pm 2.5\%$)	10 Hz
Coil Resistance ($\pm 3.5\%$)	350 Ω
Pk-Pk Coil Travel	1.78 mm
Harmonic Distortion ⁽¹⁾	$\leq 0.075\%$
Sensitivity ($\pm 2.5\%$)	22.8 V/m/s
Open Circuit Damping ($\pm 5\%$)	0.68
Damping Constant ($R_c B_c f_n$)	4925 ΩHz
Moving Mass	8.4 g
Spurious Frequency	≥ 240 Hz
AC Impedance	1049 Ω (12 Hz)
Diameter	27.4 mm
Length	30.15 mm
Weight	78 g
Operating Temperature	-40° to 90 °C

Parameters are specified at 20 °C - 0 to 15 degree tilt

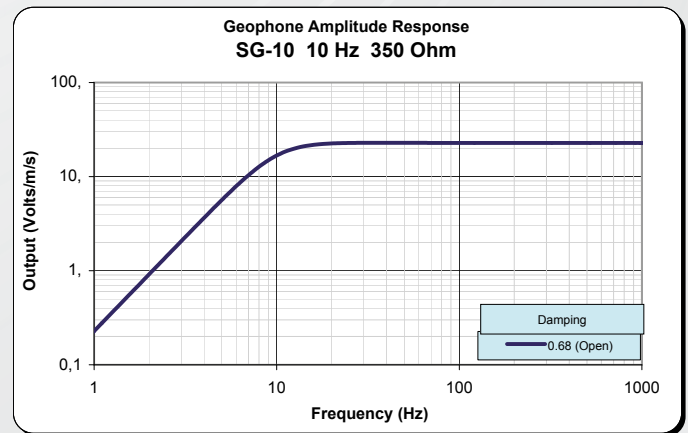

SGH-10

Operating Position	Horizontal
Natural Frequency ($\pm 2.5\%$)	10 Hz
Coil Resistance ($\pm 3.5\%$)	350 Ω
Pk-Pk Coil Travel	1.78 mm
Harmonic Distortion ⁽¹⁾	$\leq 0.075\%$
Sensitivity ($\pm 2.5\%$)	22.8 V/m/s
Open Circuit Damping ($\pm 5\%$)	0.68
Moving Mass	8.4 g
Spurious Frequency	≥ 240 Hz
AC Impedance	1049 Ω (12 Hz)
Diameter	27.4 mm
Height	30.15 mm
Weight	78 g
Operating Temperature	-40° to 90 °C



Parameters are specified at 20 °C - 0 to 5 degree tilt

CONVENTIONAL GEOPHONE SENSORS

JF-20DX

Natural Frequency ($\pm 5\%$)	10 Hz	14 Hz	28 Hz	40 Hz
Coil Resistance ($\pm 5\%$)	395 Ω			575 Ω
Pk-Pk Coil Travel	1.5 mm			
Harmonic Distortion ⁽¹⁾	$\leq 0.2\%$			
Open Circuit Sensitivity	28.0 V/m/s		39.0 V/m/s	42.0 V/m/s
Open Circuit Damping	0.30	0.22	0.27	0.37
Damping Constant ($R_T B_c f_n$)	5672 ΩHz		11003 ΩHz	17119 ΩHz
Moving Mass	11 g			8.2 g
Spurious Frequency	> 200 Hz	> 250 Hz	> 350 Hz	> 380 Hz
Damping with Resistor ($\pm 5\%$)	0.707	0.512	0.552	0.576
Damped Sensitivity ($\pm 5\%$)	20.1 V/m/s	20.1 V/m/s	28 V/m/s	30.4 V/m/s
Diameter	25.4 mm		27 mm	
Length	33.5 mm			
Weight	87 g		100 g	95 g
Operating Temperature	-40° to 70 °C			



Parameters are specified at 22 °C - 0 to 20 degree tilt

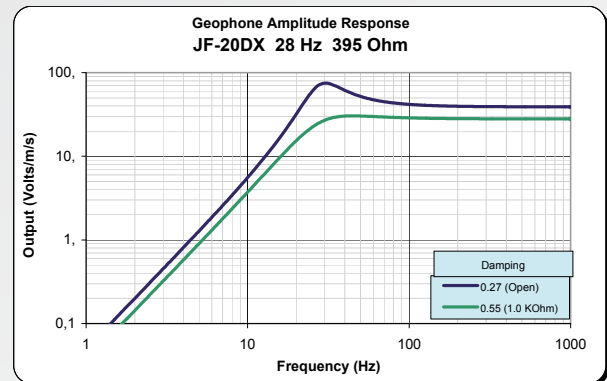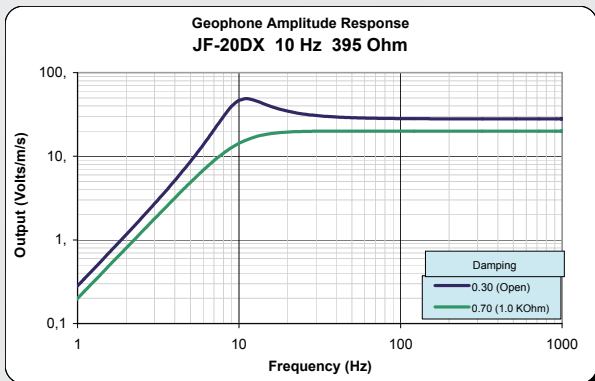

SEISMOMETERS


	L-22D			L-22E		
Natural Frequency (± 0.2 Hz)	2 Hz					
Coil Resistance	510 Ω	2200 Ω	8540 Ω	510 Ω	2200 Ω	8540 Ω
Pk-Pk Coil Travel	3.81 mm					
Sensitivity	36.5 V/m/s	75.7 V/m/s	149.2 V/m/s	47.1 V/m/s	97.9 V/m/s	192.8 V/m/s
Open Circuit Damping	0.46			0.71		
Damping Constant ($R_T B_C f_n$)	1453 ΩHz	6266 ΩHz	24323 ΩHz	2427 ΩHz	10470 ΩHz	40644 ΩHz
Shunt Resistor Value	2516	10854	42133	na	na	na
Damping with Resistor	0.70			na		
Moving Mass	72.8 g					
Diameter	60.3 mm					
Length	50.8 mm					
Weight	425 g					

Parameters are specified at 20 °C - 0 degree tilt

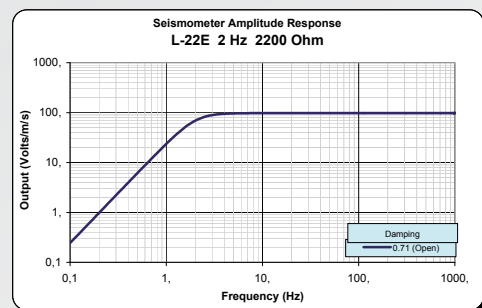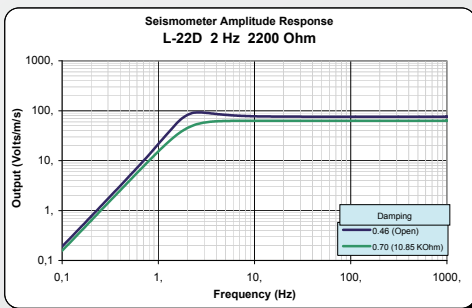

L-28LB

Natural Frequency (± 0.5 Hz)	4.5 Hz	
Coil Resistance	395 Ω ($\pm 6,5$ %)	630 Ω ($\pm 7,5$ %)
Pk-Pk Coil Travel	4 mm	
Harmonic Distortion ⁽¹⁾	0.20 %	
Sensitivity	31.3 V/m/s	39.5 V/m/s
Open Circuit Damping	0.38	
Damping Constant ($R_T B_C f_n$)	4103 ΩHz	6543.8 ΩHz
Moving Mass	19 g	
Diameter	31.8 mm	
Length	38.1 mm	
Weight	141.75 g	


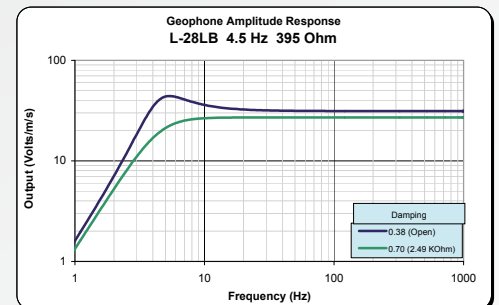


Parameters are specified at 20 °C and no tilt unless otherwise noted.


SEISMOMETERS

	L-4A			L-4C		
Natural Frequency	2 Hz (± 0.25 Hz)			1 Hz (± 0.05 Hz)		
Coil Resistance	500 Ω	2000 Ω	5500 Ω	500 Ω	2000 Ω	5500 Ω
Pk-Pk Coil Travel	6.25 mm					
Sensitivity	83.5 V/m/s	166.9 V/m/s	276.8 V/m/s	83.5 V/m/s	166.9 V/m/s	276.8 V/m/s
Open Circuit Damping (vertical units only)	0.28					
Damping Constant ($R_T B_c f_n$)	554 Ω Hz	2217 Ω Hz	6097 Ω Hz	1109 Ω Hz	4434 Ω Hz	12194 Ω Hz
70% Damping Shunt Resistor	820	3279	9016	820	3279	9016
Moving Mass	500 g			1000 g		
Diameter	76 mm					
Length	130 mm					
Weight	1700 g			2150 g		
Operating Temperature	-30° to 60 °C					

Parameters are specified at 20 °C - 0 degree tilt

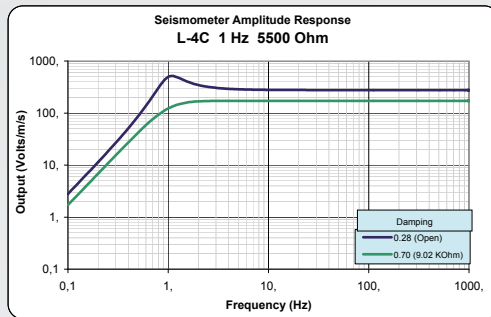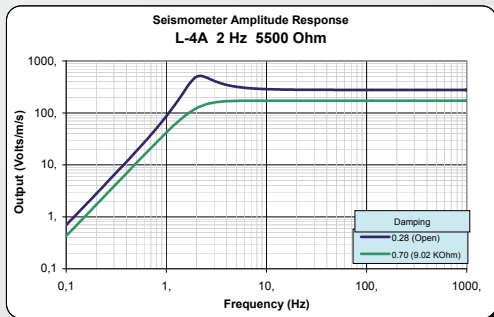

	L-10B	
Natural Frequency (± 0.5 Hz)	4.5 Hz	
Coil Resistance ($\pm 6.5\%$)	374 Ω	3600 Ω
Pk-Pk Coil Travel	2 mm	
Harmonic Distortion ⁽¹⁾	0.20 %	
Sensitivity (± 10 %)	31.2 V/m/s	96.9 V/m/s
Open Circuit Damping (± 10 %)	0.42	
Damping Constant (RTBCfn)	4561.5 Ω Hz	43907.8 Ω Hz
Moving Mass	17 g	
Spurious Frequency	na	
Diameter	31.75 mm	
Length	35.56 mm	
Weight	141.75 g	

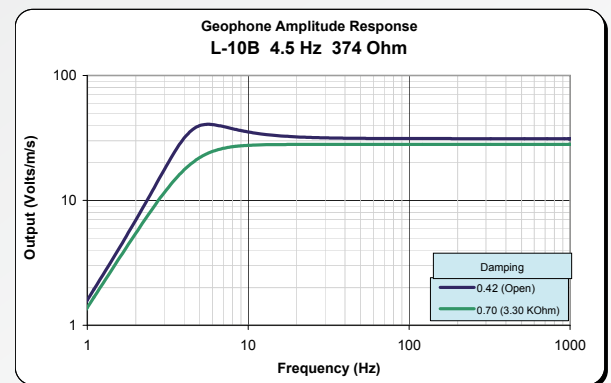

Parameters are specified at 20 °C - 0 degree tilt

GEOPHONE TESTER : SGT-II

PARAMETER	RANGE	ACCURACY OF MEASUREMENT
Natural Frequency	1 to 100 Hz	± 2 %
Coil Resistance	20 to 10000 Ω	± 1 %
Harmonic Distortion	0 to 20 %	± 10% of reading
Sensitivity	0 to 1000 V/m/s	± 2 %
Damping	0.1 to 1.2	± 1 %
Dynamic Impedance	20 to 24000 Ω	± 1 %
Leakage Test	0.1 to 10 MΩ	± 10 % (after proper zero)
Storage Capacity	AIU-II	20000 records minimum
	OIU - PC based	limited only by PC disk space approx. 7500 records/Mbyte)
Battery Run Times	AIU-II	14 hours typical @ 25 °C on internal batteries
Charger Power Requirements	AIU-II	10.5 - 16 Volts DC @ 1.5 Amps maximum
Operating Temperatures	AIU-II	-20° to 50 °C

NOTE: The following specifications assume a properly calibrated AIU.

HYDROPHONE TESTER : SGT-H

PARAMETER	RANGE	ACCURACY OF MEASUREMENT
Natural Frequency	1 to 100 Hz	± 3 %
Coil Resistance	20 to 10000 Ω	± 1 %
Damping	0.1 to 1.2	± 3 %
Sensitivity	0 to 100 V/bar	± 4 %
Dynamic Impedance	20 to 24000 Ω	± 2 %
Leakage Test	0.1 to 10 MΩ	± 10 % (after proper zero)
Humidity	10 to 90 %, noncondensing	-
Power	100-240 VAC, 47-63 Hz, 30 W	-
Sealing	Not sealed against moisture or dust	-
Dimensions, LxWxH (chamber only)	518 mm x 225 mm x 244 mm	-
Weight (chamber only)	7.2 kg (15.8 lbs)	-
Transport Case Dimensions, LxHxH	630 mm x 492 mm x 352 mm	-
Transport Weight	19.4 kg (42.7 lbs)	-
Storage Temperature	-20° to 60 °C	-
Operating Temperature	+15° to 25 °C	-



SGHT-15

	NOMINAL	HORIZONTAL	0° to 180°
Natural Frequency	15 Hz	± 5 %	- 5 % to + 15 %
Coil Resistance	2350 Ω	± 5 %	± 5 %
Sensitivity	52.0 V/m/s	- 15 % to + 5 %	- 15 % to + 5 %
Open Circuit Damping (without damping resistance)	0.50	- 15 % to + 15 %	- 20 % to + 15 %
Distortion ⁽¹⁾		≤ 0.2 %	≤ 0.9 %
Moving Mass	7.4 g		
Spurious Frequency		≥ 365 Hz	≥ 280 Hz
Coil Excursion Pk-Pk		<3.0 mm (<0.118 in)	<0.6 mm (<0.024 in)

PHYSICAL CHARACTERISTICS

Length	27.5 mm (1.082 in)
Diameter	22.25 mm (0.874 in)
Weight	43 g (1.517 oz)
Storage Temperature	-40 °C to 100 °C
Operating Temperature	-40 °C to 210 °C
Polarity	Positive terminal indicated by « + » sign
Working Position	Omni-tilt

All electromechanical specifications are valid @ 20 °C

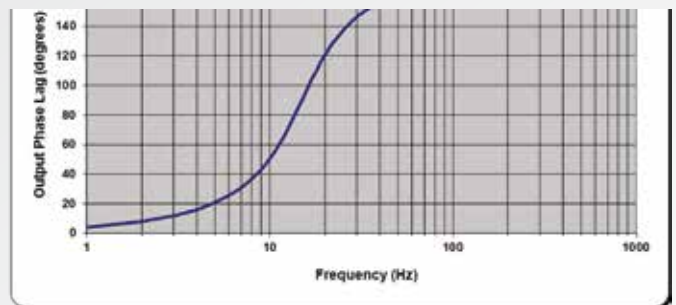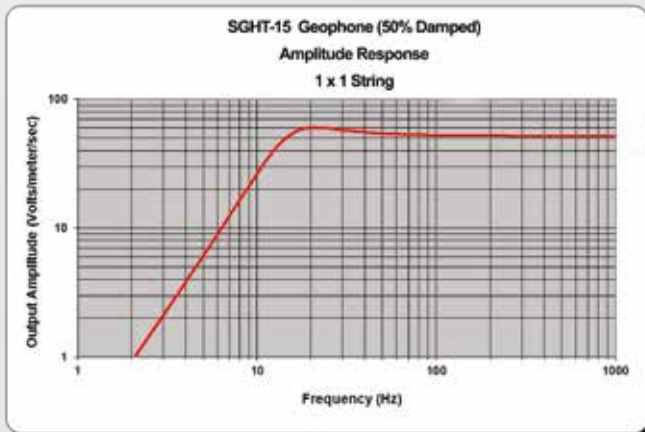

(1) measured at 17.8 mm/sec pk-pk velocity and the higher of either 12 Hz or the nominal natural frequency

All dimensions are for basic unit only (no land or marsh case)

Note: Sercel reserves the right to change its specifications without prior notice.

Sercel - France

16 rue de Bel Air

B.P. 30439 - 44474 CARQUEFOU Cedex

Téléphone : (33) 2 40 30 11 81

E-mail : sales.nantes@sercel.com

SAS au capital de 2 000 000 €

Siège Social: 16 rue de Bel Air - 44470 CARQUEFOU

378.040.497 R.C.S. Nantes Code APE 2651B

Sercel Inc. - U.S.A.

17200 Park Row

Houston, Texas 77084

Telephone : (1) 281 492 6688

E-mail : sales.houston@sercel.com

www.sercel.com

© Sercel 09/20



Ahead of the CurveSM